


PIPE

HOOK UP PIPE

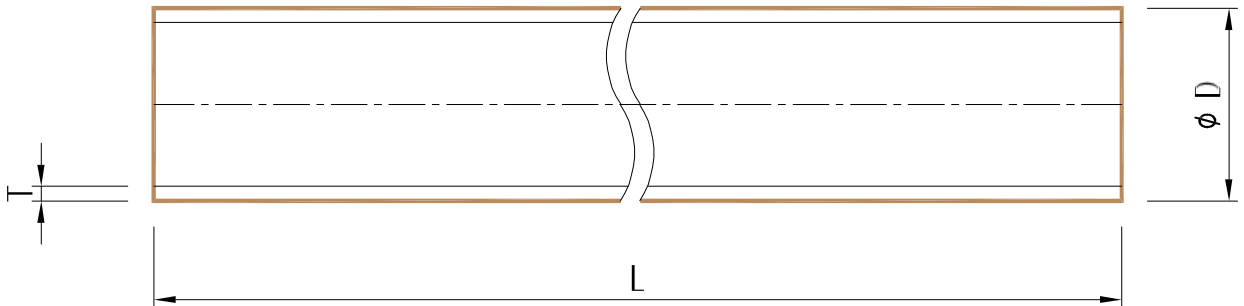

Nominal size	Ø D(O.D)		T		g/m	L	
	Standard	Allowable error	Thickness	Allowable error		Length	Allowable error
25A	32	±0.2	3.1	+0.4	0,461	4000	±10
30A	38	±0.2	3.1	+0.4	0,558		
40A	48	±0.2	3.6	+0.4	0,813		
50A	60	±0.2	4.1	+0.4	1,079		
65A	76	±0.3	4.1	+0.6	1,388		
75A	89	±0.3	5.5	+0.6	2,163		
100A	114	±0.4	6.0	+0.8	3,052		
125A	140	±0.5	6.0	+0.8	3,787		
150A	165	±0.5	6.0	+0.8	4,493		
200A	216	±0.7	6.0	+1.0	5,935		
250A	267	±0.9	6.0	+1.2	7,376		
300A	318	±1.0	6.0	+1.4	8,817	3000	

- Unit: mm , Allowable error : KS M3404 reference
- The length of the pipe is 4,000 mm. Other lengths shall be determined by agreement between the parties.