

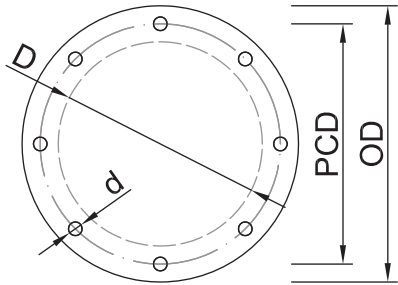



BLIND PLATE >>>
(Sizes in mm)

ORDERING INFORMATION


BP	1	C	0100	--	----
Description (产品类型) BP: BLIND PLATE (盲板)			Connection (连接形式) ----: Not Applicable (不适用)		
Material (材质) 1: SS304 (不锈钢304) 2: SS304L (不锈钢304L) 3: SS316L (不锈钢316L)			Length: L (长度) ----: Not Applicable (不适用)		
Coating Yes/No (是否喷涂) C: ETFE Coated (ETFE 喷涂) S: Stainles Steel Uncoated (不锈钢不喷涂)			Diameter: D (直径) 50mm ≤ D ≤ 3500mm eg. 0100: Diameter 100mm (直径100mm)		



Type A
DN900--DN1450

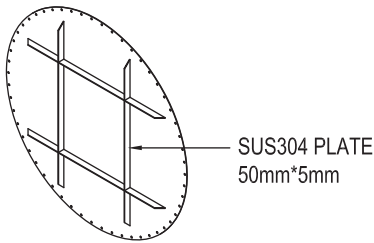

Type B
DN1500--DN1900

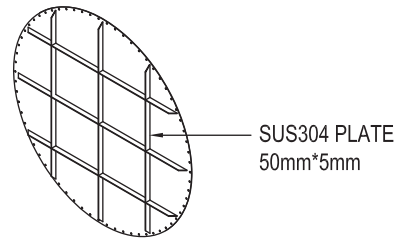

Type C
DN2000--DN3500

BLIND PLATE >>>

(Sizes in mm)

STANDARD PRODUCT DIMENSIONS

PN	D (mm)	OD (mm)	Bolt Holes			W.T (mm)
			PCD (mm)	d (mm)	Hole number n	
BP1C0050-----	50.8	75	NA	NA	NA	KF
BP1C0075-----	76.2	110	NA	NA	NA	ISO
BP1C0100-----	100	153	132	8	6	3mm
BP1C0150-----	150	203	182	10	8	3mm
BP1C0200-----	200	253	232	10	8	3mm
BP1C0250-----	250	303	282	10	10	3mm
BP1C0300-----	300	353	332	10	12	3mm
BP1C0350-----	350	413	386	10	14	3mm
BP1C0400-----	400	483	446	12	16	3mm
BP1C0450-----	450	533	496	12	16	3mm
BP1C0500-----	500	595	558	12	18	3mm
BP1C0550-----	550	645	608	12	20	3mm
BP1C0600-----	600	695	658	12	22	3mm
BP1C0650-----	650	745	708	12	24	3mm
BP1C0700-----	700	795	758	12	24	3mm
BP1C0750-----	750	845	808	12	26	3mm
BP1C0800-----	800	895	858	12	28	3mm
BP1C0850-----	850	945	908	12	30	3mm
BP1C0900-----	900	995	958	12	32	3mm with type A
BP1C0950-----	950	1045	1008	12	32	3mm with type A
BP1C1000-----	1000	1096	1058	12	34	3mm with type A
BP1C1050-----	1050	1146	1108	12	36	3mm with type A
BP1C1100-----	1100	1196	1158	12	38	3mm with type A
BP1C1150-----	1150	1246	1208	12	38	3mm with type A
BP1C1200-----	1200	1296	1258	12	40	3mm with type A
BP1C1250-----	1250	1346	1308	12	42	3mm with type A
BP1C1300-----	1300	1396	1358	12	44	3mm with type A
BP1C1350-----	1350	1446	1408	12	46	3mm with type A
BP1C1400-----	1400	1496	1458	12	46	3mm with type A
BP1C1450-----	1450	1546	1508	12	48	3mm with type A
BP1C1500-----	1500	1597	1559	12	50	3mm with type B
BP1C1600-----	1600	1697	1659	12*14	54	3mm with type B
BP1C1700-----	1700	1797	1759	12*15	56	3mm with type B
BP1C1800-----	1800	1897	1859	12*16	60	3mm with type B
BP1C1900-----	1900	1997	1959	12*17	62	3mm with type B
BP1C2000-----	2000	2097	2059	12*18	66	3mm with type C
BP1C2100-----	2100	2225	2159	12*19	68	3mm with type C
BP1C2200-----	2200	2325	2259	12*20	72	3mm with type C
BP1C2300-----	2300	2425	2359	12*21	76	3mm with type C
BP1C2400-----	2400	2525	2459	12*22	78	3mm with type C
BP1C2500-----	2500	2625	2560	12*23	82	3mm with type C
BP1C2600-----	2600	2726	2660	12*24	84	3mm with type C
BP1C2800-----	2800	2926	2860	12*25	90	3mm with type C
BP1C3000-----	3000	3126	3060	12*26	98	3mm with type C
BP1C3500-----	3500	3626	3560	12*27	112	3mm with type C